

## HSR 575 W/60

HSR brand | Metal halide lamps



### Areas of application

- Entertainment
- Architainment

### Product family benefits

- Outer bulb for ease of handling

### Product family features

- Single-ended lamps similar to HTI lamps



## Product datasheet

### Technical data


#### Electrical data

Nominal wattage	575.00 W
Nominal voltage	95.0 V
Lamp voltage	95 V
Nominal current	7 A
Lamp current	7.0 A

#### Photometrical data

Luminance	10000 cd/cm <sup>2</sup>
Color temperature	6000 K
Luminous efficacy	85 lm/W

#### Dimensions & weight

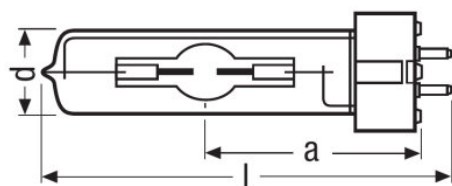

Diameter	30.0 mm
Length	125.0 mm
Light center length (LCL)	65.0 mm

#### Lifespan

Lifespan	1000 h
----------	--------

#### Additional product data

Base (standard designation)	GX9.5
-----------------------------	-------

#### Capabilities

Burning position	Other
------------------	-------

#### Environmental information

## Product datasheet

### Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)

<b>Date of Declaration</b>	19-01-2022
<b>Primary Article Identifier</b>	4050300941776   4008321625885
<b>Candidate List Substance 1</b>	No declarable substances contained
<b>Declaration No. in SCIP database</b>	In work

### Country specific information

<b>Product code</b>	<b>METEL code</b>	<b>SEG-No.</b>	<b>STK-Number</b>	<b>UK Org</b>
4050300941776	OSRHSR57560	-	-	-
4050300941776	OSRHSR57560	-	-	-

## Product datasheet

---

### Safety advice

Because of their high luminance, UV radiation and high internal pressure during operation, HSR lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Appropriate filters must ensure that UV radiation is reduced to an acceptable level. Mercury is released if the lamp breaks. Special safety precautions must be taken. Information on safety and handling is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

HSR lamps are not capable of hot restarts.

---

### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321625885	HSR 575 W/60	Folding carton box 1	57 mm x 57 mm x 173 mm	0.56 dm <sup>3</sup>	140.00 g
4008321625892	HSR 575 W/60	Shipping carton box 10	295 mm x 216 mm x 134 mm	8.54 dm <sup>3</sup>	1258.33 g
4050300941776	HSR 575 W/60	Folding carton box 1	- x - x -		
4050300941783	HSR 575 W/60	Shipping carton box 10	295 mm x 197 mm x 235 mm	13.66 dm <sup>3</sup>	1191.50 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

---