

## 64571 800 W 240 V

Halogen studio lamps, double-ended



### Areas of application

- Professional film and TV work
- Theater and concert stages
- Entertainment

### Product family features

- Operation at mains voltage: 120 V | 230 V | 240 V
- Color temperature: 3,200 K (for professional film and TV work)
- Color temperature: 3,400 K (for maximum luminous efficacy)



Technical data

Product information

|                 |                 |
|-----------------|-----------------|
| Order reference | 64571 DXX P2/13 |
|-----------------|-----------------|


Electrical data

|                               |                 |
|-------------------------------|-----------------|
| Nominal wattage               | 80000 W         |
| Nominal voltage               | 240...250 V     |
| On-mode power                 | 820.00 W        |
| Energy consumption in on-mode | 820.0 kWh/1000h |

Photometrical data

|                                       |          |
|---------------------------------------|----------|
| Color temperature                     | 3200 K   |
| Color rendering index Ra              | 100      |
| Luminous efficacy                     | 256 lm/W |
| Φuse value refers to luminous flux .. | 360      |
| Correlated color temperature CCT      | 3121 K   |
| Useful luminous flux (Φuse)           | 18760 lm |
| Chromaticity coordinate x             | 0.429    |
| Chromaticity coordinate y             | 0.401    |

Dimensions & weight

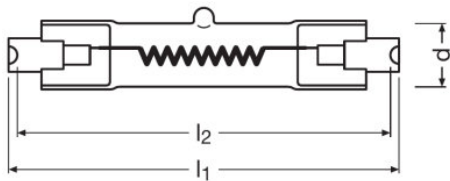

|                                             |          |
|---------------------------------------------|----------|
| Diameter                                    | 170 mm   |
| Length                                      | 749 mm   |
| Length with base excl. base pins/connection | 78.30 mm |

Lifespan

|          |      |
|----------|------|
| Lifespan | 75 h |
|----------|------|

Product datasheet

Additional product data

|                             |     |
|-----------------------------|-----|
| Base (standard designation) | R7s |
| Lighting technology used    | HL  |

Capabilities

|                  |                     |
|------------------|---------------------|
| Burning position | Other <sup>1)</sup> |
|------------------|---------------------|

<sup>1)</sup> Burning position preferably horizontal, vertical possible for a short time

Certificates & standards

|                         |   |
|-------------------------|---|
| Energy efficiency class | G |
|-------------------------|---|

Country specific categorizations

|                 |                 |
|-----------------|-----------------|
| ANSI code       | DXX             |
| LIF             | P2/13           |
| Order reference | 64571 DXX P2/13 |

Logistical data

|                                  |               |
|----------------------------------|---------------|
| EAN 10 of contained light source | 4050300283388 |
|----------------------------------|---------------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |                                    |
|-----------------------------------------------------------------------|------------------------------------|
| Date of Declaration                                                   | 22-04-2024                         |
| Primary Article Identifier                                            | 4050300283388                      |
| Candidate List Substance 1                                            | No declarable substances contained |
| Declaration No. in SCIP database                                      | No declarable substances contained |

Country specific information

| Product code  | METEL code    | SEG-No. | STK-Number | UK Org |
|---------------|---------------|---------|------------|--------|
| 4050300283388 | OSRH64571240V | -       | -          | -      |
| 4050300283388 | OSRH64571240V | -       | -          | -      |

# Product datasheet

## Safety advice

To prevent personal injury or damage to property, halogen lamps may only be operated in suitable luminaires designed with suitable mechanisms (protective shields, grids, etc.) to ensure that in the event of a lamp bursting no parts/shards can escape and that during operation no ultraviolet radiation can escape. There must also be a warning sign to indicate that the lamps give off high levels of heat. Detailed information is available on request.

## Logistical Data

| Product code  | Product description | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume               | Gross weight |
|---------------|---------------------|---------------------------------|-----------------------------------------|----------------------|--------------|
| 4050300283388 | 64571 800 W 240 V   | Folding carton box<br>1         | - x - x -                               |                      |              |
| 4008321114075 | 64571 800 W 240 V   | Shipping carton box<br>50       | 345 mm x 180 mm x<br>127 mm             | 7.89 dm <sup>3</sup> | 956.00 g     |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## References / Links

A summary of studio lamps can be found on the halogen studio lamps poster.  
For more information on halogen lamps for studio, stage and TV see the brochure:  
"Good news for show business"  
"Halogen High Voltage Lamps" cross reference list

## Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.