

PL-AR-G5 2500-865 540X270

PrevaLED Area G5 | Area and Bar Light Engines



Product family features

- Module efficacy: up to 188 lm/W
- Average lifetime (L80 B50): up to 70,000 h (temperature at $T_c = 55^\circ\text{C}$)
- Available with luminous flux: 2,530 lm
- Available with color temperature: 3,000 K, 4,000 K or 6,500 K
- High initial color consistency: ≤ 3 SDCM
- CE marked, ENEC certified

Product family benefits

- Rectangular shape (540 mm x 270 mm) to fit in multiple square applications
- Easy installation and mounting via interconnection of two modules
- Provides homogenous light suitable for application in area luminaires
- SELV module for easy luminaire design

Areas of application

- Offices
- Hallways, corridors
- Light ceilings



Technical data

Electrical data

Nominal voltage	38.3 V
Nominal current	0.35 A
Type of current	DC

Photometrical data

Luminous efficacy	188 lm/W
Color rendering index Ra	80


Light technical data

Beam angle	0 °
Starting time	< 0.1 s
Warm-up time (60 %)	< 2.00 s

LED module information

Number of LEDs per module	120
---------------------------	-----

Dimensions & weight

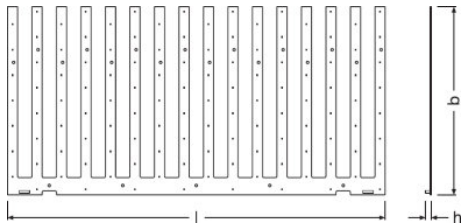

Product weight	215.00 g
Length	540.0 mm
Width	270.0 mm
Height	5.0 mm

Temperatures & operating conditions

Performance temp. acc. to IEC 62717	55 °C
Temperature range in operation at Tc point	-20...75 °C
Maximum temperature at tc test point	75 °C

Product datasheet

Temperature range at storage	-30...85 °C
------------------------------	-------------

Lifespan

Number of switching cycles	100000
----------------------------	--------

Additional product data

Predecessor EAN	4052899529397
-----------------	---------------

Capabilities

Dimmable	Yes
----------	-----

Certificates & standards

Standards	CE/ENEC
Type of protection	IP20

Logistical data

Commodity code	85395100000
----------------	-------------

Environmental information



Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH)	
Date of Declaration	18-04-2022
Primary Article Identifier	4052899619128
Candidate List Substance 1	No declarable substances contained
Declaration No. in SCIP database	No declarable substances contained



484525_5 Year Osram Guarante
(GB)

Product datasheet

Download Data

File	
	Certificates PL ENEC 40031612 250723
	Declarations of conformity PL AR G5 2500 540x270 CE 4201872 160623

Ecodesign regulation information:

Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899619128	PL-AR-G5 2500-865 540X270	Shipping carton box 20	595 mm x 363 mm x 293 mm	63.28 dm ³	6461.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.