

# LEDinspect POCKET PRO400

Inspectionlights



## Multi-Angle Flex & Twist

High flexibility and diverse adjustment possibilities thanks to multi angle positioning




## 400 Lumen

Up to 400 lumens and integrated switch for dimming the light



## 2 in 1 Function

Inspection light & torch light combined in one



## 2-year-OSRAM guarantee\*

Systematic quality assurance measures underpin the premium workmanship and functionality of our products. Innovative technology and excellent quality really pay dividends for our customers.

## Product datasheet



### Light is versatile

This high-quality inspection light from OSRAM is designed to illuminate hard-to-reach areas. The POCKET PRO 400 combines a slim design with multi-axis rotation and tilting so that the light can be directed exactly where it is needed. Additionally, the flexible mounting options offer hands-free working. The pocket size with only 6mm depth and the low weight make this inspection light ideal for the workshop. This LED inspection light emits up to 400 lumens. It has a white light with up to 6000K for comfortable working conditions and is therefore designed for wide illumination as well as for the illumination of narrow spaces. The light intensity can be easily adjusted via the on/off switch. In addition, the POCKET PRO 400 has a powerful torch for a concentrated beam of light. It is rechargeable and cordless, with Li-ion battery for constant light output. The lamp has an operating time of up to 3h and a recharging time of approx. 4h. Charging cable and mains plug included. In addition, OSRAM provides a 2-year guarantee on this product\*

Technical data

Product information

|                                             |                       |
|---------------------------------------------|-----------------------|
| Order reference                             | LEDIL409              |
| Application (Category and Product specific) | LED inspection lights |

Electrical data

|                 |       |
|-----------------|-------|
| Nominal wattage | 962 W |
| Nominal voltage | 37 V  |


Photometrical data

|                   |        |
|-------------------|--------|
| Color temperature | 6000 K |
| Luminous flux     | 400 lm |
| Light color LED   | White  |

LED module information

|                           |   |
|---------------------------|---|
| Number of LEDs per module | 2 |
|---------------------------|---|

Dimensions & weight

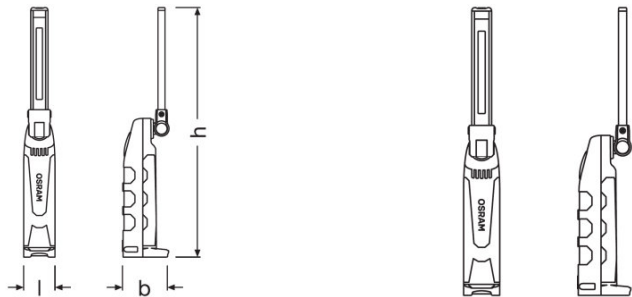

|                |         |
|----------------|---------|
| Product weight | 20600 g |
| Length         | 2150 mm |
| Width          | 1000 mm |
| Height         | 550 mm  |

Colors & materials

|            |                |
|------------|----------------|
| Base color | Black / Orange |
|------------|----------------|

Lifespan

|           |         |
|-----------|---------|
| Guarantee | 2 years |
|-----------|---------|

Additional product data

|                              |                                  |
|------------------------------|----------------------------------|
| Type of Battery              | Rechargeable                     |
| Number of included batteries | 1                                |
| Scope of battery             | Yes                              |
| Battery                      | High-quality lithium-ion battery |

Capabilities

|            |     |
|------------|-----|
| Technology | LED |
|------------|-----|

Certificates & standards

|           |                  |
|-----------|------------------|
| Standards | CE/EMC/MSDS/ROHS |
| IK Class  | IK06             |

Country specific categorizations

|                 |          |
|-----------------|----------|
| Order reference | LEDIL409 |
|-----------------|----------|

Environmental information

| Information according Art. 33 of EU Regulation (EC) 1907/2006 (REACH) |                                                                                                    |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Date of Declaration                                                   | 07-03-2024                                                                                         |
| Primary Article Identifier                                            | 4052899622906                                                                                      |
| Candidate List Substance 1                                            | Lead                                                                                               |
| CAS No. of substance 1                                                | 7439-92-1                                                                                          |
| Safe Use Instruction                                                  | The identification of the Candidate List substance is sufficient to allow safe use of the article. |
| Declaration No. in SCIP database                                      | bce4864c-75dc-487e-8eaf-2fa43e657f44                                                               |



Detail



Detail



Detail

Product datasheet

Logistical Data

| Product code  | Product description | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume               | Gross weight |
|---------------|---------------------|---------------------------------|-----------------------------------------|----------------------|--------------|
| 4052899622906 | INSPECTION LAMP     | Folding carton box<br>1         | 100 mm x 55 mm x<br>190 mm              | 1.05 dm <sup>3</sup> | 248.00 g     |
| 4052899624023 | INSPECTION LAMP     | Shipping carton box<br>6        | 224 mm x 189 mm x<br>232 mm             | 9.82 dm <sup>3</sup> | 1728.00 g    |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

| File                                                                              |                                                           |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------|
|  | User instruction<br>LEDinspect POCKET PRO 400             |
|  | Movie application<br>LEDinspect Inspection Lights Trailer |

**Application advice:**  
For more detailed application information and graphics please see product datasheet and user instruction.

\*for precise conditions please refer to:  
[www.osram.com/am-guarantee](http://www.osram.com/am-guarantee)

**Application advice**  
For more detailed application information and graphics please see product datasheet.

**Disclaimer**  
Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

